

MX6

Adaptus™ Imaging Technology or integrated laser scanner.

Lightweight contoured design is engineered for use over extended periods of time with minimal user fatigue.

High-capacity battery enables full shift operation.



HANDHELD COMPUTERS

Integrates Wi-Fi™ compliant/802.11b wireless technology.

Full alphanumeric keypad and large, color, ¼ VGA display with touch screen.

'Built-in' customer support with LXE's ServicePASS™ program.


LXE is RUGGED MOBILE COMPUTERS AND SECURE WIRELESS NETWORKS.

Maximum flexibility with extensive features

The MX6 is the perfect handheld for a wide variety of data collection applications in the warehouse and distribution center. Use the imager for 1D and 2D barcode scanning, and even digital photos – great for quality control applications. Choose the laser scanner for traditional bar code laser scanning applications.

Industry leading platform

The MX6 runs on the Windows® Mobile™ 2003 for Pocket PC operating system with an Intel® XScale™ PXA255 processor, giving you the highest performing processor available in a handheld device and the freedom to select the software solution that best suits you.

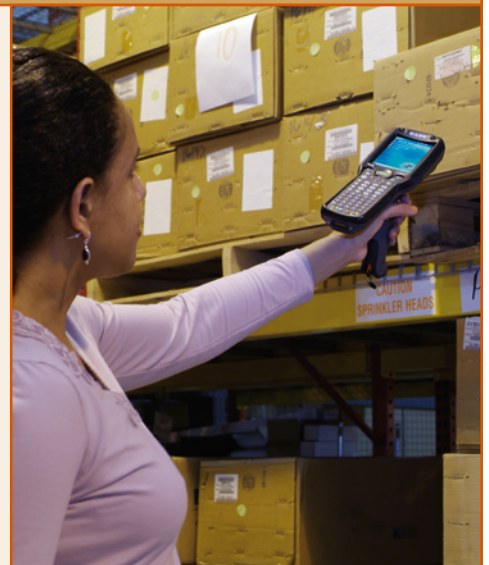

MX6

Technical Specifications



Processing & Memory

- Intel® XScale® PXA255 processor, 400MHz
- RAM: 64MB
- Flash: 32MB non-volatile flash

Operating Systems & Emulations

- Windows® Mobile™ 2003 for Pocket PC Browser support via Microsoft® Pocket Explorer
- Optional software: RFTerm® terminal emulation VT220, TN5250, TN3270
- SDK
- Personal JAVA 1.2 JVM

Keyboard

- 35 key numeric-alpha
- 56 key full alphanumeric
- Polyurethane coated for resistance to abrasions
- Backlit for use in low-light environments
- TN5250 terminal emulation overlay available

Display

- Color TFT ¼ VGA display with backlight and touch screen
- 240 x 320 pixels

Power Supply and Management

- Rechargeable lithium ion battery pack 7.4, 14.8 watt-hour main battery with hot swappable design
- Advanced power management
- Rechargeable backup battery
- Low battery indicator (display icon)
- 8+ hour battery life (with typical usage)

Interfaces

- Industrial USB/serial connector
- Dock communications - USB & serial
- IrDA port
- Touch screen interface
- Bluetooth tested
- Speaker - programmable for volume, duration and pitch
- Microphone & headset jack

Expansion

- User accessible SD (Secure Digital) memory slot
- Compatible with 64MB, 128MB, 256MB, SD cards

Wireless Communications Support

- IEEE 2.4GHz 802.11b DSSS WLAN radio
- Supports a broad range of wireless security protocols including LEAP & WPA
- Optimized internal antenna

Enclosure

- Dimensions: 9.6" L x 3.45" W x 1.66" D at display (24.53 x 8.76 x 4.23cm) 2.7" W x 1.5" D at grip (6.9 x 3.8cm)
- Weight: Batch - 19.7oz (558gm) WLAN - 20.2oz (573gm) & scanner

Environmental

- Temperature rating Operating: 14°F to 122°F (-10°C to 50°C) Storage: -4°F to 158°F (-20°C to 70°C)
- Humidity: 5 to 95% NC
- Shock: multiple 5ft (1.5m) drops to concrete
- Water & Dust: IEC529 rating IP64
- Elec. Static Discharge: 15k on all surfaces

Approvals

- Electrical: Complies to CE
- Emissions: FCC Part 15 - Class A

Bar Code and Imaging

- Integrated area imager 1-D, 2-D decoding with imager capture capabilities
- Integrated 1-D laser scanners Standard Range (HP) Long Range (LR) Advanced Long Range (ALR)

Bar Code Symbology

- Area Imager: UPC A, E / EAN 8, 13, EAN 128, Code 128 Code 93 Interleaved 2 or 5, Standard 2 of 5, Code 39, Code 39 Full ASCII, Code 32 Codabar, MSI / Plessey, PDF 417, Maxicode,

Data Matrix, QR, RSS, EAN.UCC, Aztec, OCR

- 1-D Laser Scanners: Code 39, Interleaved 2 of 5, UPC A, E, Code 128, Plessey, EAN 8, 13 Code 93 and Codabar

Accessories

- Desktop cradle with auxiliary charging & communications
- Powered vehicle cradle (12-72V)
- Passive vehicle cradle
- 4-slot charger /analyzer
- Holsters
- Cases
- 4-bay communications dock
- AC power supply
- DC power supply (cig. lighter adapter)
- USB / Serial Interface cables
- 4-Slot desktop cradle with ethernet
- Stylus



LXE



Switzerland - OPAL Associates AG - Motorenstrasse 116 - CH-8620 Wetzikon - Tel.: +41(0)44 931 12 22 - Fax: +41(0)44 931 12 20 - Email: info@opal-holding.com - www.opal.ch
Germany - OPAL Associates GmbH - Lohnerhofstrasse 2 - D-78467 Konstanz - Tel.: +49(0)7531 813 00 0 - Fax: +49(0)7531 813 00 99 - Email: info@opalgmbh.de - www.opalgmbh.de
Austria - OPAL Associates GesmbH - Donaufelderstrasse 101/2/8 - A-1210 Wien - Tel.: +43(0)1 270 03 13 - Fax: +43(0)1 270 03 15 - Email: info@opalgmbh.at - www.opalgmbh.at
France - OPAL Associates SA - Avenue des Boveresses 54 - CH-1000 Lausanne - Tel.: +41(0)21 653 95 00 - Fax: +41 (0) 21 653 95 02 - Email: info@opal-holding.com - www.opalsa.ch
Denmark - OPAL Associates ApS - Plutovej 7 - DK-8722 Hedensted - Tel.: +45 7674 1510 - Fax: +45 7589 2733 - Email: info@opalaps.dk - www.opalaps.dk
Weitere Standorte: München, Hamburg, Frankfurt, Darmstadt, Bregenz, Lyon

www.opal-holding.com