



DT100 - ALL-ROUND BOX LABELLING

DT100 is a flexible "multi-purpose" **direct thermal Print&Apply** solution that suits many applications within box- and product labelling - meeting demands for both accuracy and speed.

The DT100 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come - even in the most harsh industrial environments!

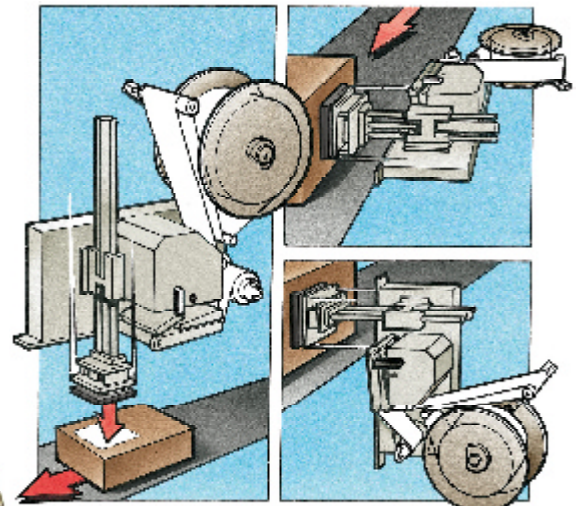

Box, tray and parcel labelling. Applies on both moving and stationary products!

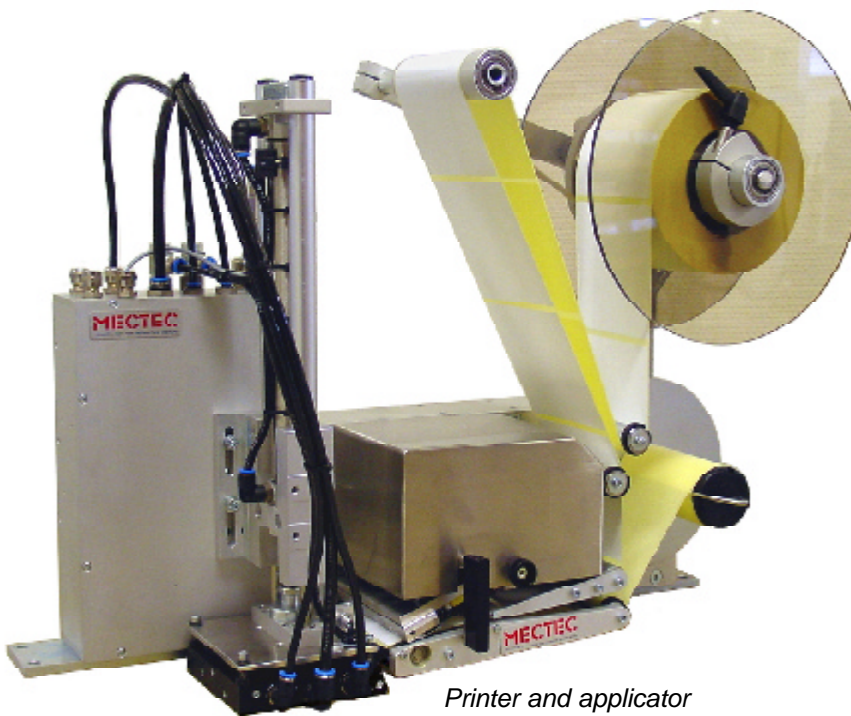

Printer and applicator in right hand version



Handheld terminal TG300 (optional)



Printer Control Unit PCU III

TECHNICAL DATA

Type of applicator:	Tamp/Tamp-Blow. The blow can be switched off
Tamp size:	110 x 110 mm
Print speed:	Up to 275 mm/sec
Resolution:	8 or 12 dots/mm 200/300 DPI
Interface:	2 x RS232, 1 x RS485, 1 x Parallel
Overall dimensions:	625 x 506 x 234 mm (l x h x w) - P & A 406 x 265 x 128 mm (l x h x w) - PCU III
Controller functions:	On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

FAST FACTS

Printer:	4" Direct Thermal
Application:	Side, top or bottom labelling Stationary or moving object
Label size:	40 x 40 - 105 x 105 mm
Distance:	0 - 160 mm

Available in both right- and left hand version!

ACCESSORIES

- TG300 - Handheld terminal
- Warning Low Level Labels
- Longer Stroke
- Label Check in the Applicator Pad
- Flashlight/Beacon
- Check scanner
- Fixed or adjustable stands