



IS4225 ScanGlove is a fully automatic single-line laser scanning device. Incorporating patented activation technology, the IS4225 can be used as a "hands-free" wearable scanner or a stationary desktop scanner.

Same great performance as IS4220, with more features!

Sunrise 2005 Compliant

IS4225 ScanGlove®

Features

- Hands-free or desktop scanning
- Fully automatic operation
- Lightweight and durable
- Breakaway cable for added safety
- Short or long range activation
- Flash ROM (RS232 model only)


Metrologic's IS4225 ScanGlove is a fully automatic single-line laser scanning device. Incorporating patented activation technology, the IS4225 can be used as both as "hands-free" wearable scanner or a stationary desktop scanner.

Used as a wearable scanner, the IS4225 mounts easily and comfortably to the back of an operator's hand. By mounting the scanner to the back of the hand and connecting to a portable data collector, the operator is not restricted and can freely move about. The scanner reads bar codes automatically as the operator presents the scanner to the code. Whether used for order picking, shipping/receiving, or inventory control, this simple scanning movement will undoubtedly provide increased flexibility for the operator and ultimately

render increased productivity.

The distinct design of the IS4225 allows for the same scanning function and automatic activation, but in a completely different environment. When the IS4225 is connected directly to a personal computer, document scanning and order entry are made simple and fast. By presenting the bar code to the scanner, data can be automatically entered into a computer.

The IS4225 scanner has built in decoding for applications that use a RS232, Keyboard Wedge, Stand Alone Keyboard, Light Pen Emulation or USB communication interface.

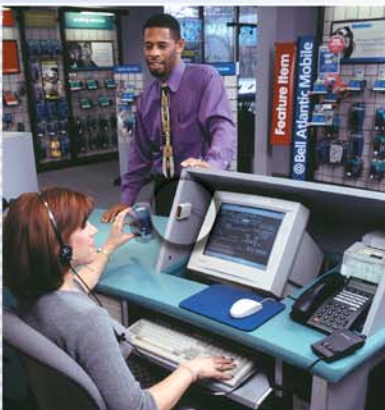

IS4225 ScanGlove®

OPERATIONAL

Light Source	Visible Laser Diode 650 nm ± 10 nm
Laser Power	0.800 mW (peak)
Depth of Scan Field	12.7 mm - 203 mm (0.5" - 8") for 0.33 (13 mil) bar code
Width of Scan Field	28.6 mm (1.125") @ face; 102 mm (4") @ 76.2 mm (3")
Scan Speed	52 scan lines per second
Scan Pattern	Single scan line
Minimum Bar Width	0.173 mm (6.8 mil)
Decode Capability	Autodiscriminates all standard bar codes; for other symbologies call Metrologic
System Interfaces	RS232, Light Pen Emulation, PC Keyboard Wedge, Stand Alone Keyboard, USB (low speed)
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters
Roll, Pitch, Yaw	42°, 68°, 52°
Beeper Operation	3 tones or no beep
Indicators (LED)	Red = laser on, ready to scan; Green = good read

MECHANICAL


Dimensions	Length: 70 mm (2.75") Width: 49 mm (1.94") Height: 24 mm (0.94")
Weight	105 g (3.7 oz)
Termination	Breakaway connector or 10 position modular RJ45
Cable	Straight, breakaway or 1.5 m (5') coiled

ELECTRICAL


Input Voltage	5 VDC ± 0.25 V
Power	0.75 W
Operating Current	135 mA
DC Transformers	Class 2; 5 VDC @ 300 mA
Laser Class	CDRH and IEC Class 2 in accordance with IEC 60825-1:1993+A1:1997 +A2:2001
EMC	FCC Class A, CISPR Class A

Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 4842 Lux (450 footcandles)
Shock	Designed to withstand 1.5 m (5') drops
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required

Scan Area

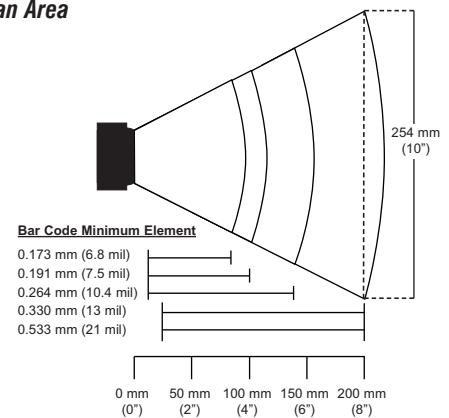

Dimensions

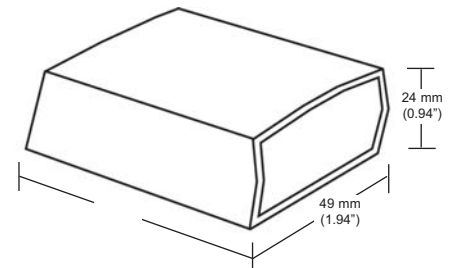

Standard ScanGlove Colors

Sample only, actual colors may vary



Light Grey



Black

ScanGloves are available in a variety of other colors with minimum quantity purchase



Switzerland • OPAL Associates AG • Motorenstrasse 116 • CH-8620 Wetzikon • Telefon +41 (0)1 931 12 22 • Telefax +41 (0)1 931 12 20 • Email info@opal-holding.com • URL <http://www.opal.ch/> • OPAL Associates SA • Avenue des Boveresses 54 • Case postale 29 • CH 1000 Lausanne 21 • Telefon +41 (0)21 653 95 00 • Telefax +41 (0)21 653 95 02 • Email info@opal-holding.com • URL <http://www.opalsa.ch/> • Germany • OPAL Associates GmbH • Lohnerhofstrasse 2 • D-78467 Konstanz • Telefon +49 (0)7531 813 000 • Telefax +49 (0)7531 813 00 99 • Email info@opal-holding.com • URL <http://www.opalgmbh.de/> • OPAL Associates GmbH • Osterholder Allee 2 • 25421 Pinneberg • Telefon +49 (0)4101 787 615 • Telefax +49(0)4101 787 616 • Email info@opal-holding.com • OPAL Associates GmbH • München • Telefon +49 (0)89 12737 556 • Telefax +49 (0)89 12737 557 • Email info@opal-holding.com • OPAL Associates GmbH • Frankfurt • Telefon +49 (0)69 8236 6501 • Telefax +49 (0)69 8236 7709 • Email info@opal-holding.com • OPAL Solutions GmbH • Wilhelmstr. 22 • 52428 Jülich • Telefon +49 (0)2461 936 770 • Telefax +49(0)2461 936 771 • Email info@opal-holding.com • URL <http://www.opal-solutions.de/> • Austria • OPAL Associates GesmbH • Vorarlberger Wirtschaftspark • A-6840 Götzis • Telefon +43 (0) 5523 58833 • Telefax +43 (0)5523 521569 • Email info@opal-holding.com • URL <http://www.opalgmbh.at/> • OPAL Associates GesmbH • Donaufelderstr. 101/2/8 • 1210 Wien • Telefon +43 (0)1 270 03 13 • Telefax +43(0)1 270 03 15 • Email info@opalgmbh.at

